

Current and Voltage Conveyors in Current- and Voltage-Mode Precision Full-Wave Rectifiers

Jaroslav KOTON, Norbert HERENCŠAR, Kamil VRBA

Dept. of Telecommunications, Brno University of Technology, Purkynova 118, 612 00 Brno, Czech Republic

koton@feec.vutbr.cz, herencsn@feec.vutbr.cz, vrbak@feec.vutbr.cz

Abstract. *In this paper new versatile precision full-wave rectifiers using current and/or voltage conveyors as active elements and two diodes are presented. The performance of these circuit solutions is analysed and compared to the opamp based precision rectifier. To analyze the behavior of the functional blocks, the frequency dependent RMS error and DC transient value are evaluated for different values of input voltage amplitudes. Furthermore, experimental results are given that show the feasibilities of the conveyor based rectifiers superior to the corresponding operational amplifier based topology.*

Keywords

Precision full-wave rectifier, current conveyor, voltage conveyor, instrumentation, measurements.

1. Introduction

In applications such as ac voltmeters and ammeters, signal-polarity detectors, averaging circuits, peak-value detector rectification function is of great importance [1]. Because of the threshold voltage of the diodes, simple passive rectifiers operate inaccurately, if low-voltage signals are analyzed. Therefore precision rectifiers employing active elements have to be used.

Probably the most known precision rectifiers are based on operational amplifiers (opamps) [1]. However, because of the finite slew-rate and effects caused by diode commutation, these circuits operate well only at low frequencies [2], [3]. This problem can be overcome by the use of current conveyors (CCs), where the diodes are connected to the high-impedance current outputs of the active elements. In [4]–[7] the same precision full-wave rectifier is analyzed (Fig. 2b). It uses two second-generation CCs and four diodes. To further extend the frequency range the voltage [4], [7] or current [6], [7] biasing scheme can be used. Another precision full-wave rectifier is presented in [8] that is based on the standard opamp rectifier shown in Fig. 2a. Here, the OPA1 is replaced by the operational conveyor and later by second-generation CC [3]. A full-wave rectifiers using second-

generation and dual-X current conveyors are presented in [9] and [10], respectively, where the required diodes are suitably replaced by NMOS transistors. The use of fully differential operational transconductance amplifiers (BOTA) operating in weak inversion region for the design of precision full-wave rectifiers is presented in [11], which is based on the idea discussed in [12], where simple transconductance amplifiers (OTA). Here, the transconductance of OTA is controlled by the current derived from the input signal to be rectified. In another group of precision rectifiers, a transistor connected to the current output of an active element operates as a switch. For this purpose the current conveyor [13] or transconductance amplifiers [14]–[16] are used.

All the circuit solutions in [4]–[16] operate in the voltage or mixed mode. The current research in analog functional block design gets more focused on the realization of the current-mode (CM) circuits [17]. In this area mainly the frequency filters can be mentioned, e.g. [18]–[21]. However, a number of current-mode full-wave rectifiers can also be found in the literature [22]–[25], where unity-gain cells or current differencing transconductance amplifiers are used.

In this paper two new precision full-wave rectifiers employing current and/or voltage conveyors together with two diodes are presented. They are of minimal configuration and can operate both in the voltage- and current-mode. The behavior of these circuits is compared to the known conveyor based solution presented in [4]–[7] and also to the opamp based full-wave rectifier. Simulation and furthermore experimental measurement results are given that show the feasibility of the newly designed circuits to rectify signals up to 1 MHz and beyond with no or little distortion.

2. Current and Voltage Conveyors

In 1968, the current conveyors were presented for the first time [26], however they did not find any significant usage since the operational amplifiers were more attractive at that time. Current conveyors received considerable attention after the second (CCII) [27] and later third (CCIII) [28] generation current conveyors were designed. These elements are now advantageously used in applications, where the wide bandwidth or current output response is necessary. Nowa-

days, different types of current conveyors are described that are mostly based on the CCII, e.g. current controlled CC (CCCII) [29], differential voltage CC (DVCC) [30], or electronically tunable CC (ECCII) [19], [31]. The behavior of a four-terminal CCII (Fig. 1(a)) is described by the following equations:

$$v_X = v_Y, \quad i_Y = 0, \quad i_{Z+} = i_X, \quad i_{Z-} = -i_X. \quad (1)$$

Another flexible building block for active circuit synthesis is the voltage conveyor (VC) [32]. Based on the duality to current conveyors, first-, second-, and third-generation voltage conveyors can be described [33]. The current differencing buffered amplifier (CDBA) [34] can be identified as the differential current voltage conveyor (DCVC+) [35]. In [36]–[38], the universal voltage conveyor (UVC) has been described (Fig. 1(b)). It is a 6-port active element that has one voltage input X, two current differencing inputs YP and YN, and two mutually inverse voltage outputs ZP and ZN. The auxiliary voltage input W is used to determine the generation of the voltage conveyor [38]. The relation between the terminal currents and voltages is described by the following set of equations:

$$i_X = i_{YP} - i_{YN}, \quad v_{YP} = v_{YN} = v_W, \quad (2)$$

$$v_{ZP} = v_X, \quad v_{ZN} = -v_X. \quad (3)$$

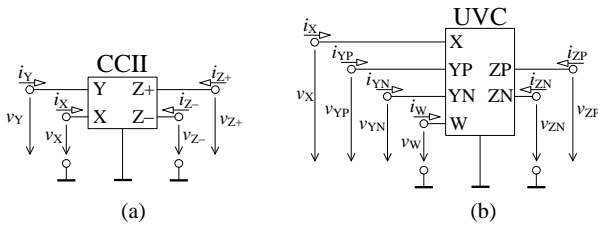


Fig. 1. Circuit symbol of (a) the four-terminal CCII, (b) the universal voltage conveyor UVC.

3. New Precision Full-Wave Rectifiers

The standard opamp based circuit from Fig. 2(a) [1] is a connection of an inverting half-wave rectifier (OPA₁) and summing amplifier (OPA₂). For the desired full-wave rectification the following conditions have to be fulfilled:

$$R_1 = R_2, \quad R_4 = 2R_3, \quad (4)$$

or

$$R_2 = 2R_1, \quad R_3 = R_4, \quad (5)$$

which generally means that the half-wave rectified signal must be amplified two times higher than the original input signal $v_{IN}(t)$, either more commonly by the summing amplifier (according to (4)) or by the half-wave rectifier (according to (5)).

A well known circuit topology of the full-wave rectifier using two second-generation current conveyors CCII+ is

shown in Fig. 2(b) [4]–[7]. Both CCII form a differential voltage-to-current converter. During the positive and negative input cycle the output currents make only the diodes D₂, D₄ and D₁, D₃ active, respectively. On the resistor R₂ the output current is converted back to voltage. Both circuits from Fig. 2 can operate only in the voltage-mode, or in case of the conveyor based rectifier (Fig. 2(b)) in the transadmittance-mode.

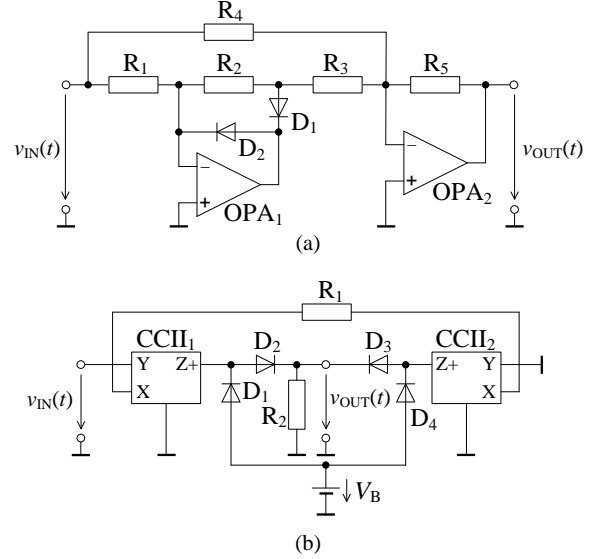


Fig. 2. Voltage-mode (a) standard opamp based [1], (b) known conveyor based full-wave rectifier from [4]–[7].

New conveyor based precision full-wave rectifiers working in the current-mode are shown in Fig. 3, where the structure in Fig. 3(a) and Fig. 3(b) employs two second-generation current conveyors, and one CCII and one universal voltage conveyor, respectively. Both solutions are of minimal configuration since only two active elements and two diodes have to be used. Routine analysis leads to the following expressions of the output currents:

$$i_{OUT+}(t) = |i_{IN}(t)|, \quad i_{OUT-}(t) = -|i_{IN}(t)|. \quad (6)$$

In theory, since the input signal $i_{IN}(t)$ is directly applied to the current terminal X of the CCII₁ and the current responses are taken from the Z-terminals of the CCII₂ (Fig. 3(a)) or from the X-terminal of the UVC (Fig. 3(b)) the input and output impedances of the proposed rectifiers are zero and infinitely high, respectively. Therefore, both rectifiers are easily cascable.

Adding the resistors R₁, R₂, or R₃ into the current-mode rectifiers from Fig. 3, new voltage-mode precision rectifiers can be obtained (Fig. 4). The resistors represent simple voltage-to-current and current-to-voltage converters and the output voltages can be expressed as:

$$v_{OUT1+}(t) = \frac{R_3}{R_1} |v_{IN}(t)|, \quad v_{OUT1-}(t) = -\frac{R_2}{R_1} |v_{IN}(t)|, \quad (7)$$

$$v_{OUT2+}(t) = -v_{OUT2-}(t) = \frac{R_2}{R_1} |v_{IN}(t)|. \quad (8)$$

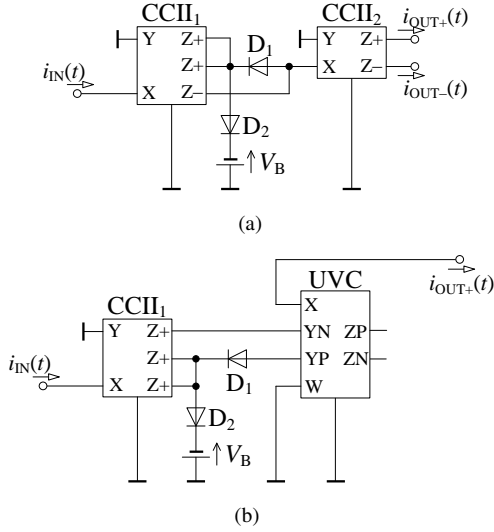


Fig. 3. New current-mode precision full-wave rectifiers using (a) two current conveyors, (b) one current and voltage conveyor.

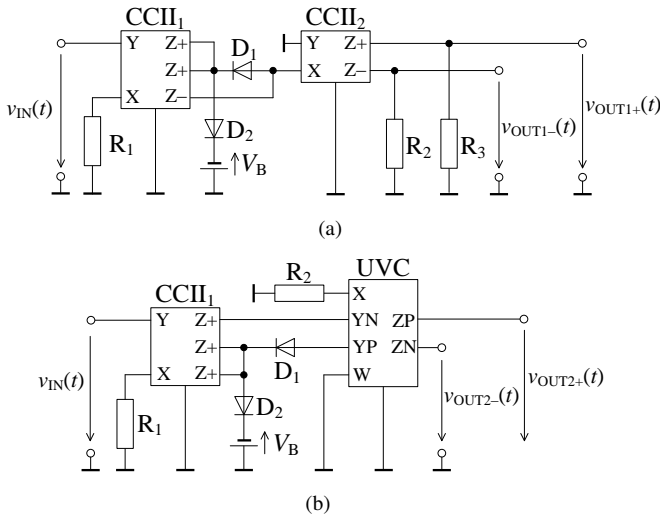


Fig. 4. New voltage-mode precision full-wave rectifiers using (a) two current conveyors, (b) one current and voltage conveyor.

In Fig. 4, the input voltage $v_{IN}(t)$ is directly connected to the Y-terminal of the CCII1 and therefore the input impedance of both rectifiers is infinitely high in theory. In case of circuit from Fig. 4(b), the output impedance is theoretically zero, since the ZP and ZN terminals of the universal voltage conveyor represent outputs of voltage followers (3).

4. DC and RMS Error Analyses

To evaluate and compare the accuracy of the voltage-mode full-wave rectifiers from Fig. 2 and Fig. 4 the DC value transfer p_{DC} and RMS error p_{RMS} have been analyzed [39]:

$$p_{DC} = \frac{\int_T y_R(t) dt}{\int_T y_{ID}(t) dt}, \quad (9)$$

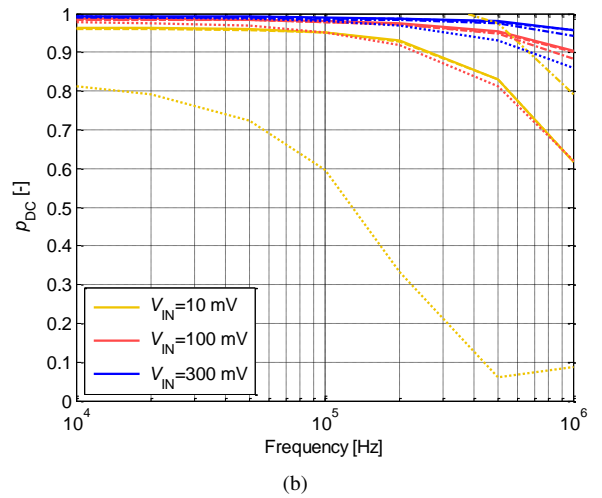
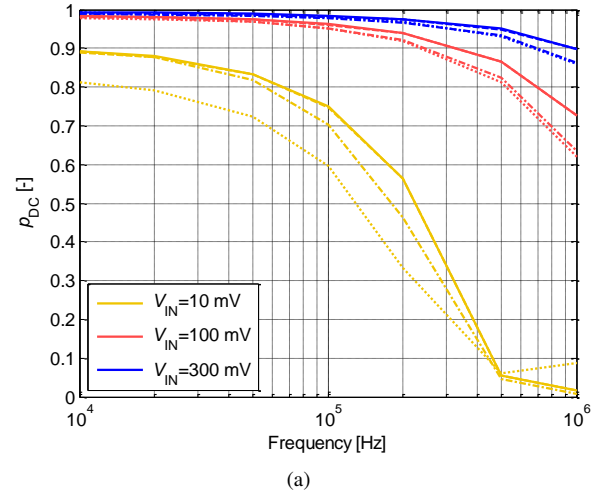


Fig. 5. DC value transfer for (a) $V_B = 0$ V, (b) $V_B = 0.6$ V of the rectifiers from Fig. 2a (dotted line), Fig. 2b (dash-dotted line), Fig. 4a (dashed line), and Fig. 4b (solid line), for input voltage amplitudes 10 mV, 100 mV, and 300 mV.

$$p_{RMS} = \sqrt{\frac{\int_T [y_R(t) - y_{ID}(t)]^2 dt}{\int_T y_{ID}^2(t) dt}} \quad (10)$$

where the $y_R(t)$ and $y_{ID}(t)$ represent the actual and ideally rectified signal and T is the period of the input signal. The ideal behavior of the rectifier is characterized by the values $p_{RMS} = 0$ and $p_{DC} = 1$.

Using (9) and (10) the behavior of the newly proposed voltage-mode rectifiers (Fig. 4) has been compared with the standard opamp and known conveyor based circuits from Fig. 2(a) and Fig. 2(b). As active elements the universal current conveyor UCC-N1B and universal voltage conveyor UVC-N1C have been used [38], [40]. The current and voltage transfer bandwidths of the UCC and UVC are about 35 MHz [40]. Therefore, in the standard opamp based rectifier the AD8656 has been used [41]. The diodes are general purpose 1N4148 and all resistors are 1 k Ω (in Fig. 2(a) $R_3 = 500 \Omega$).

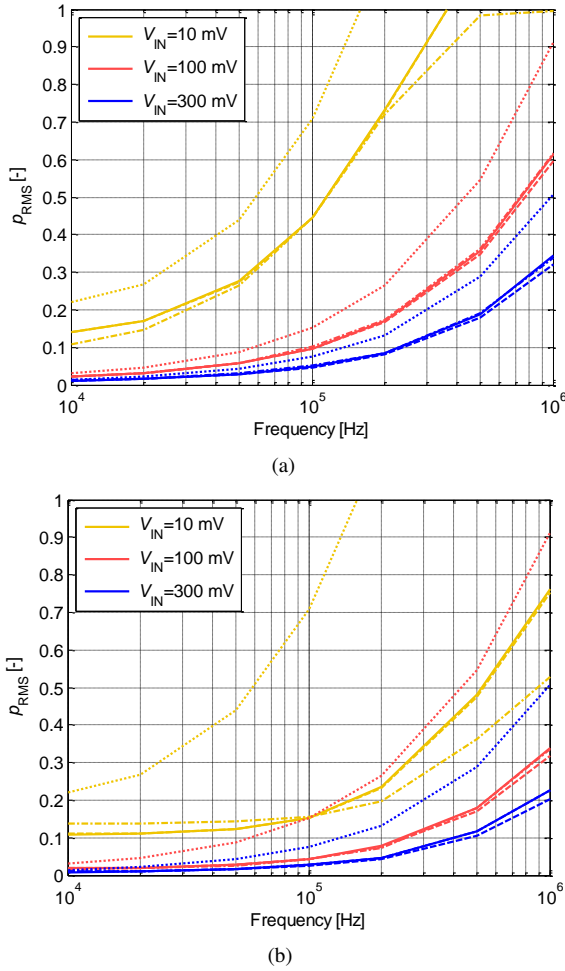


Fig. 6. RMS error for (a) $V_B = 0$ V, (b) $V_B = 0.6$ V of the rectifiers from Fig. 2a (dotted line), Fig. 2b (dash-dotted line), Fig. 4a (dashed line), and Fig. 4b (solid line), for input voltage amplitudes 10 mV, 100 mV, and 300 mV.

The simulation results of the frequency dependent DC value transfer and RMS error for chosen values of amplitudes V_{IN} are shown in Fig. 5 and Fig. 6, where the solid, dashed, dash-dotted and dotted lines stand for the circuits from Fig. 4(b), Fig. 4(a), Fig. 2(b), and Fig. 2(a), respectively. (The solid and dashed lines are almost identical.) If the frequency increases and/or amplitude decreases distortions occur and the p_{DC} decreases below one and p_{RMS} increases. From Fig. 5 and Fig. 6 it is evident that the best results are achieved with the new minimal configuration rectifiers. For an appropriate value of the bias voltage (here $V_B = 0.6$ V), the conveyor based precision rectifiers can operate at higher frequencies (Fig. 5(b), Fig. 6(b)).

5. Experimental Measurements

The behavior of the voltage-mode precision full-wave rectifiers from Fig. 4 has also been verified by experimental measurements and compared to the known opamp (Fig. 2(a)) and current conveyor (Fig. 2(b)) based solutions. In Fig. 7 the DC transfer characteristics are shown. Due to high volt-

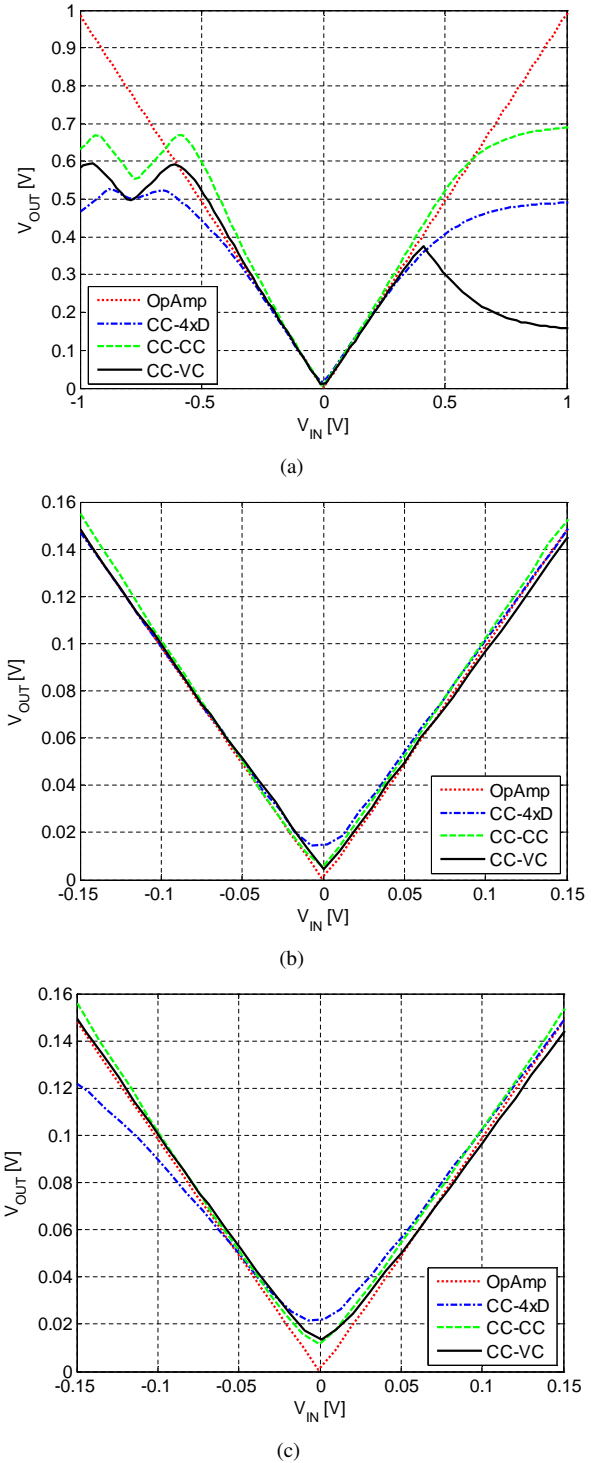


Fig. 7. Measured DC transfer functions of the voltage mode rectifier from Fig. 2(a) (dotted line), Fig. 2(b) (dash-dotted line), Fig. 4(a) (dashed line), and Fig. 4(b) (solid line) for (a), (b) $V_B = 0$ V, (c) $V_B = 0.6$ V.

age gain of the opamps, the DC error of the circuit from Fig. 2(a) is minimized and the DC transfer is almost ideal (in Fig. 7 dotted line). The non-unity voltage and current transfers of the current conveyors cause higher DC error of the conveyor based full-wave rectifiers (Fig. 7(b)). This error is more evident, mainly in the zero crossing area, if a bias voltage is applied (Fig. 7(c)).

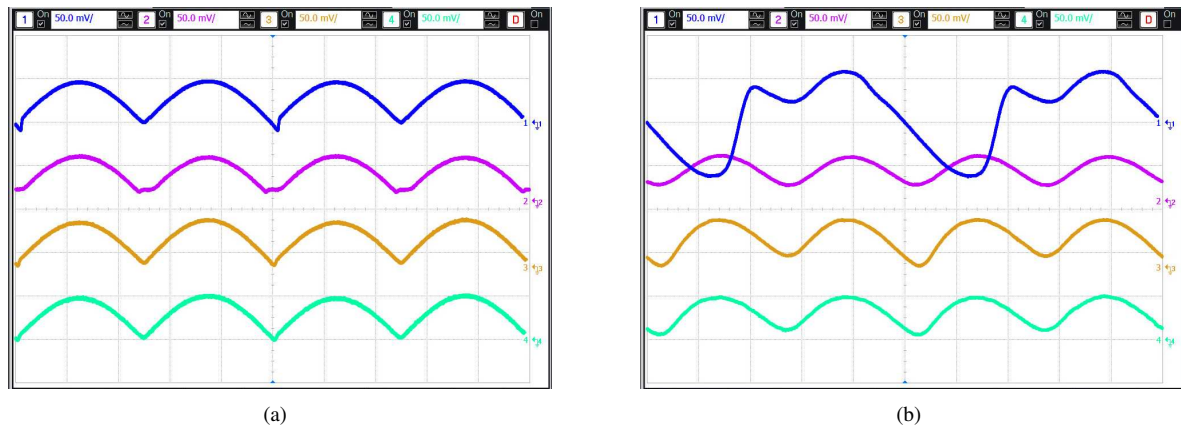


Fig. 8. Transient responses of the precision full-wave rectifiers from Fig. 2a (trace 1), Fig. 2b (trace 2), Fig. 3c (trace 3), Fig. 3d (trace 4) for a signal amplitude 50 mV and frequencies (a) $f = 10$ kHz ($V_B = 0$ V), (b) $f = 1$ MHz ($V_B = 0.6$ V).

Although the DC error of the conveyor based full-wave rectifiers is higher, from transient analyses (Fig. 8) it can be seen that the behavior of the conveyor based circuits is superior to the opamp full-wave rectifier. For an input voltage with the 50 mV amplitude at frequency 10 kHz the behavior of all rectifiers is almost identical, only the conveyor based circuit from Fig. 2(b) shows significant error in the zero crossing area (Fig. 8(a)). However, when the frequency grows voltage biasing is necessary. In Fig. 8(b) the measurement results for an 50 mV amplitude input sinusoidal voltage at frequency 1 MHz are shown ($V_B = 0.6$ V). At this frequency the rectification function of the opamp based circuit is totally missing (trace 1), however it can be still observed in the conveyor based circuits.

6. Conclusion

In this paper the performance of conveyor based precision full-wave rectifiers has been analyzed and compared to the standard opamp based topology. Two new minimal configuration rectifiers have been presented, that employ current and/or voltage conveyors and two diodes. These rectifiers can work in the voltage-, current-, and transmittance-mode. Simulation and experimental measurements were performed that prove the feasibility of the proposed conveyor based full-wave rectifiers.

Acknowledgements

The paper has been supported by projects: GACR 102/10/P561, GACR 102/09/1681, MSM0021630513, and FEKT-S-10-16.

References

[1] TIETZE, U., SCHENK, CH., GRAMM, E. *Electronic Circuits-Handbook for Design and Application*. Berlin (Germany): Springer, 2008.

[2] TOUMAZOU, C., LIDGEY, F. J. Fast current-mode precision rectifier. *Electron. Wireless World*, 1987, vol. 93, no. 1621, p. 1115 - 1118.

[3] GIFT, S. J. G., MAUNDY, B. Versatile precision full-wave rectifiers for instrumentation and measurements. *IEEE Trans Instrum. Meas.*, 2007, vol. 56, no. 5, p. 1703 - 1710.

[4] TOUMAZOU, C., LIDGEY, F. J., CHATTONG, S. High frequency current conveyor precision full-wave rectifier. *Electronics Letters*, 1994, vol. 30, no. 10, p. 745 - 746.

[5] KHAN, A. A., EL-ELA, M. A., AL-TURAIGI, M. A. Current-mode precision rectification. *Int. J. Electron.*, 1995, vol. 79, no. 6, p. 853 - 859.

[6] WILSON, B., MANNAMA, V. Current-mode rectifier with improved precision. *Electronics Letters*, 1995, vol. 31, no. 4, p. 247 - 248.

[7] STIURICA, D. Truly temperature independent current conveyor precision rectifier. *Electronics Letters*, 1995, vol. 31, no. 16, p. 1302 - 1303.

[8] GIFT, S. J. G. A high-performance full-wave rectifier circuit. *Int. J. Electron.*, 2000, vol. 87, no. 8, p. 925 - 930.

[9] YUCE, E., MINAEI, S., CICEKOGLU, O. Full-wave rectifier realization using only two CCII+s and NMOS transistors. *Int. J. Electron.*, 2006, vol. 93, no. 8, p. 533 - 541.

[10] MINAEI, S., YUCE, E. A New full-wave rectifier circuit employing single Dual-X current conveyor. *Int. J. Electron.*, 2008, vol. 95, no. 8, p. 777 - 784.

[11] CHANAPROMMA, C., DAODEN, K. A CMOS fully differential operational transconductance amplifier operating in sub-threshold region and its application. In *Proc. IEEE 2nd Int. Conf. Signal Proc. Systems - ICSPS 2010*. Dalian (China), 2010, p. V2-73 - V2-77.

[12] JONGKUNSTIDCHAI, C., FONGSAMUT, C., KUMWACHARA, K., SURAKAMPONTORN, W. Full-wave rectifiers based on operational transconductance amplifiers. *Int. J. Electron. Commun.*, 2007, vol. 61, p. 195 - 201.

[13] MAHESHWARI, S. Current controlled precision rectifier circuits. *J. Circuits, Systems, and Computers*, 2007, vol. 16, no. 1, p. 129 - 138.

[14] MINHAI, N. Transconductance element-based non-inverting and inverting precision full-wave rectifier circuits. In *Proc. IEEE Int. Conf. Advantages in Computing, Control, and Telecommunication Technologies*. Trivandrum (India), 2009, p. 442 - 445.

[15] MINHAI, N. OTA-based non-inverting and inverting precision full-wave rectifier circuits without diodes. *Int. J. Recent Trends in Engineering*, 2009, vol. 1, no. 3, p. 72 - 75.

- [16] MINHAJ, N. Electronically controlled precision full-wave rectifier circuits. In *Proc. IEEE Int. Conf. Advantages in Recent Technologies in Communication and Computing*. Kottayam (India), 2009, p. 240 - 243.
- [17] FERRI, G., GUERRINI, N. C. *Low-voltage low-power CMOS current conveyors*. Cluwer Academic Publishers, 2003.
- [18] TAKAGI, S. Analog circuit designs in the last decade and their trends toward the 21st century. *IEICE Trans. Fundamentals*, 2001, vol. E84-A, no. 1, p. 68 - 79.
- [19] MINAEI, S., SAYIN, O. K., KUNTMAN, H. A new CMOS electronically tunable current conveyor and its application to current-mode filters. *IEEE Trans. Circuits Systems I*, 2006, vol. 53, no. 7, p. 1448 - 1457.
- [20] HERENC SAR, N., KOTON, J., VRBA, K., CICEKOGLU, O. Single UCC-N1B 0520 device as a modified CFOA and its application to voltage- and current-mode universal filters. In *Proc. Applied Electronics - APPEL 2009*. Pilsen (Czech Republic), 2009, p. 127-130.
- [21] HERENC SAR, N., KOTON, J., VRBA, K. Single CCTA-based voltage- and current-mode universal biquadratic filters employing minimum components. *Int. J. Comp. Elect. Engineering*, 2009, vol. 1, no. 3, p. 316 - 319.
- [22] LIDGEY, F. J., HAYTLEH, K., TOUMAZOU, C. New current-mode precision rectifiers. In *Proc. IEEE Int. Symp. Circuits and Systems*. Chicago (USA), 1993, p. 1322 - 1325.
- [23] TILIUTE, D. E. Full-wave current-mode precision rectifiers using unity-gain cells. *Elektronika ir Elektrotechnika*, 2003, vol. 49, no. 7, p. 26 - 29.
- [24] BIOLEK, D., HANCIOGLU, E., KESKIN A. U. High-performance current differencing transconductance amplifier and its application in precision current-mode rectification. *Int. J. Electron. Commun.*, 2008, vol. 62, no. 2, p. 92 - 96.
- [25] KHATEB, F., VAVRA, J., BIOLEK, D. Current-mode full-wave rectifier based on one CDTA and two diodes. *Radioengineering*, 2010, vol. 19, no. 3, p. 437 - 445.
- [26] SMITH, K. C., SEDRA, A. The current conveyor: a new circuit building block. *IEEE Proc.*, 1968, vol. 56, p. 1368 - 1369.
- [27] SEDRA, A. SMITH, K. C. A second-generation current conveyor and its application. *IEEE Trans. Circ. Th.*, 1970, vol. 17, p. 132 - 134.
- [28] FABRE, A. Third-generation current conveyor: a new helpful active element. *Electronics Letters*, 1995, vol. 31, no. 5, p. 338 - 339.
- [29] FABRE, A., SAAID, O., WIEST, F., BAUCHERON, C. High frequency applications based on a new current controlled conveyor. *IEEE Trans. Circuits Syst.-I*, 1996, vol. 43, no. 2, p. 82 - 90.
- [30] ELWAN, H. O., SOLIMAN, A. M. Novel CMOS differential voltage current conveyor and its applications. *IEE Proc. Circuits, Devices, Systems*, 1997, vol. 144, no. 3, p. 195 - 200.
- [31] SURAKAMPONTORN, W., KUMWACHARA, K. CMOS-based electronically tunable current conveyor. *Electronics Letters*, 1992, vol. 28, no. 14, p. 1316 - 1317.
- [32] FILANOVSKY, I. M., STROMSMOE, K. A. Current-voltage conveyor. *Electronics Letters*, 1981, vol. 17, no. 3, p. 129 - 130.
- [33] DOSTAL, T., POSPISIL, J. Hybrid models of 3-port immittance converters and current and voltage conveyors. *Electronics Letters*, 1982, vol. 18, no. 20, p. 887 - 888.
- [34] ACAR, C., OZOGUZ, S. A new versatile building block: current differencing buffered amplifier suitable for analog signal processing filters. *Microelectronics Journal*, 1999, vol. 30, no. 2, p. 157 - 160.
- [35] SALAMA, K., SOLIMAN, A. Novel MOS-C quadrature oscillator using the differential current voltage conveyor. In *Proc. 42nd Midwest Symposium on Circuits and Systems - MWSCAS 99*. Las Cruces (USA), 1999, p. 279 - 282.
- [36] KOTON, J., VRBA, K., HERENC SAR, N. Tuneable filter using voltage conveyors and current active elements. *Int. J. Electron.*, 2009, vol. 96, no. 8, p. 787 - 794.
- [37] HERENC SAR, N., KOTON, J., VRBA, K. A new electronically tunable voltage-mode active-C phase shifter using UVC and OTA. *IEICE Electronics Express*, 2009, vol. 6, no. 17, p. 1212 - 1218.
- [38] KOTON, J., HERENC SAR, N., VRBA, K. KHN-equivalent voltage-mode filters using universal voltage conveyors. *Int. J. Electron. Commun.* [Online] 2010, doi:10.1016/j.aeeu.2010.02.005.
- [39] BIOLEK, D., BLOKOVA, V., KOLKA, Z. AC analysis of operational rectifiers via conventional circuit simulators. *WSEAS Transactions on Circuits and Systems*, 2004, vol. 3, no. 10, p. 2291 - 2295.
- [40] SPONAR, R., VRBA, K. Measurements and behavioral modeling of modern conveyors. *Int. J. Comp. Science Net. Secur. IJCSNS*, 2006, vol. 6, no. 3A, p. 57 - 65.
- [41] Analog Devices. *AD8656 (datasheet)*. Rev. A, 06/2005.

About Authors...

Jaroslav KOTON received the M.Sc. and Ph.D. degrees in Electrical Engineering and Communication from Brno University of Technology, Czech Republic, in 2005 and 2009, respectively. He is currently an assistant professor at the Department of Telecommunications of the Faculty of Electrical Engineering and Communication of Brno University of Technology, Czech Republic. His research is focused on linear- and nonlinear-circuits with current or voltage conveyors, and current active elements. He is an author or co-author of about 65 research articles published in international journals or conference proceedings.

Norbert HERENC SAR received the M.Sc. and Ph.D. degree in electrical engineering from the Brno University of Technology, Czech Republic, in 2006 and 2010, respectively. His research interests include analog filters, current-mode circuits, tuneable frequency filter design methods, and oscillators. He is an author or co-author of about 55 research articles published in international journals or conference proceedings.

Kamil VRBA received the Ph.D. degree in Electrical Engineering in 1976, and the Prof. degree in 1997, both from the Technical University of Brno. Since 1990 he has been Head of the Dept. of Telecommunications, Faculty of Electrical Engineering and Computer Science, Brno University of Technology, Brno, Czech Republic. His research work is concentrated on problems concerned with accuracy of analog circuits and mutual conversion of analog and digital signals. In cooperation with AMI Semiconductor Czech, Ltd. (now ON Semiconductor Czech Republic, Ltd.) he has developed number of novel active function blocks for analog signal processing such as universal current conveyor (UCC), universal voltage conveyor (UVC), programmable current amplifier (PCA), and others. He is an author or co-author of more than 650 research articles published in international journals or conference proceedings.